

### FLUSH MOUNTED BUNK BED LIGHT

Naval Flush Mounted Bunk Bed Light with Diamond Structure Polycarbonate Diffuser. Conforms to IP22. Available with 1x9W TC-S lamp with additional feature of 2 Pin Charging Socket.

IP 22

#### Features

Housing & Cover : CRCA fabrication body with Zink Yellow Passivation as per DF STAN 03-20 and RAL 9010 epoxy powder coated surface finish.(can be customized on requirement )  
-CRCA Thk : 1mm

Control gear: Control gear unit consists of open construction ballast and mains connector with Loopin Loopout facility.

Additional : 2 Pin Charging Socket.

Mains Supply Voltage : 115 Volt AC Singal Phase Or 230 Volt AC Singal Phase

Misc. : G23 Polycarbonate lamp holder for CFL

#### Optics

Diamond Structure Polycarbonate diffuser.

#### Installation

Flush Mounted / Surface Mounted


#### Applications

For Bunk Bed Illumination.

#### Product Photo




#### Product Dimensions

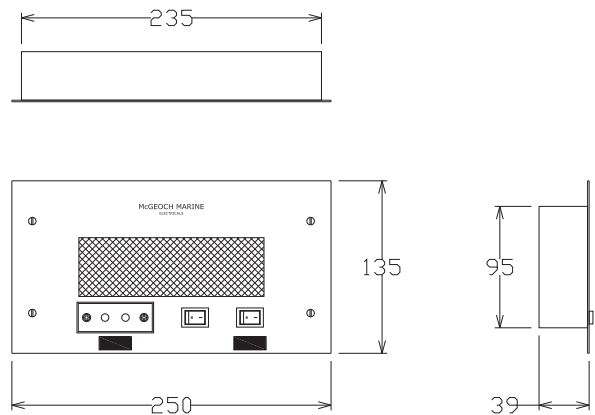

#### How To Order This Product

Catalogue Number	Lamp Type	Dimensions (mm)			Electrical Paramters		Accessories			
		A	B	C	Volt (V <sub>AC</sub> )	Mains Current (Amp)	Ballast	Capacitor	Starter	Lamp Holder
MME-COM-01/F/1x9W/230	1x9W TC-S	250	135	39	230	0.17	OPT 09 C	NA	NA	G23
MME-COM-01/F/1x9W/115	1x9W TC-S	250	135	39	115	0.17	OPT 09 C	NA	NA	G23



TC-S