

FLUSH MOUNTED FOOTLIGHT

Naval Footlight luminaire with Aluminium die cast (LM6) body. Conforms to IP54. Available for GLS lamp upto 100W, 1x7W TC-S and 1x9W TC-S lamps.

IP 54

Features

Housing & Cover : Aluminium die casting housing with Ral 9010 epoxy powder coated finish. (can be customised on requirement) Gasket ensures IP54 protection.

Control gear: Control gear unit consists of open construction ballast and mains connector for CFL version.

Misc. : G23 Polycarbonate lamp holder for CFL lamp. & 2 Pin BC Porcelian Lamp Holder for GLS Lamp

Optics

Inner surface of the housing in Ral 9010 epoxy powder coated acts as reflector.

Installation

Surface mounted on lugs by two bolts.


Applications

For Pathway Illumination.

Product Photo




Product Dimensions

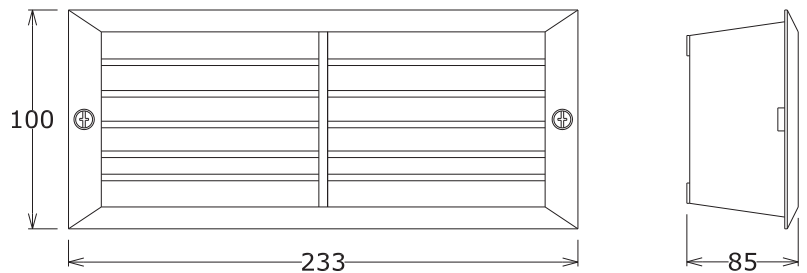

How To Order This Product

Catalogue Number	Lamp Type	Dimensions (mm)			Electrical Paramters		Accessories			
		A	B	C	Volt (V)	Mains Current (Amp)	Ballast	Capacitor	Starter	Lamp Holder
MME-COM-08/107 MA	1x7W TC-S	233	100	85	230	0.19	OPT 07 C	NA	NA	G23
MME-COM-08/109 MA	1x9W TC-S	233	100	85	230	0.17	OPT 09 C	NA	NA	G23
MME COM 08 60/100	1x60/100W GLS	233	100	85	240	NA	NA	NA	NA	B22



TC-S



As effort are on constantly to improve the design and methods of manufacturing of the product, the product supplied may differ in detail from the data given here in.
This Design and drawing is the property of McGeoch Marine Electricals Pvt. Ltd. and must not be copied or lent without their permission in writing.

Product Type : Industrial Lighting

Prepared By : Anil Raut

Approved By : Chetan Lomate

Document No :
TD MMECOM08