

FLUSH MOUNTED BUNK BED LIGHT

Naval Flush Mounted Bunk Bed Light with Diamond Structure Polycarbonate Diffuser. Conforms to IP22. Available with 1x5W (5050) LED with additional feature of 2 Pin Charging Socket.

IP 22

Features

Housing & Cover : CRCA fabrication body with Zink Yellow Passivation as per DF STAN 03-20 and RAL 9010 epoxy powder coated surface finish.(can be customized on requirement)
-CRCA Thk : 1mm

Optics

Diamond Structure Polycarbonate diffuser.

Installation

Flush Mounted

Control gear: Control gear unit consists of constant current Power Supply and mains connector with Loopin Loopout facility.

Applications


For Bunk Bed Illumination.

Mains Supply Voltage : 110...230 Volt AC Singal Phase & 24 Volt DC

Product Photo



Product Dimensions

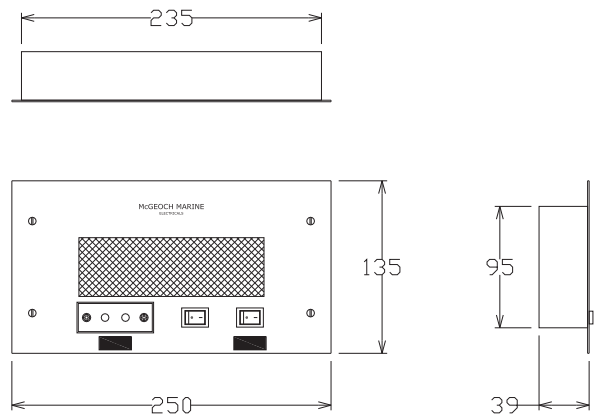

How To Order This Product

Catalogue Number	LED Type	Dimensions (mm)			Electrical Paramters		Accessories			
		A	B	C	Input Voltage	Mains Current (Amp)	Power Supply	Capacitor	Starter	Lamp Holder
MME-COM-01-F-LED	1x5W LED	250	135	39	110...230 V AC	0.350	6W, 0.350A, 24V	NA	NA	NA
MME-COM-01-F-LED-DC	1x5W LED	250	135	39	24 V DC	0.350	6W, 0.350A, 24V	NA	NA	NA



LED



As effort are on constantly to improve the design and methods of manufacturing of the product, the product supplied may differ in detail from the data given here in.
This Design and drawing is the property of McGeoch Marine Electricals Pvt. Ltd. and must not be copied or lent without their permission in writing.

Product Type : Industrial Lighting

Prepared By : Anil Raut

Approved By : Chetan Lomate

Document No :
TD MMECOM01FLED