



Sheet 1 of 1

LED TROUGH LIGHT

Naval Surface mounted LED Trough Light with Opal Polycarbonate / Prysmatic Diffuser. Conforms to IP54. Available with 4x6 Watt LED lamps.

Features

- Housing & Cover : CRCA fabrication body with Zink Yellow Passivation as per DF STAN 03-20 and RAL 9010 epoxy powder coated surface finish.(can be customised on requirement) -Quick release Quarter turn Fasteners arrangement for quick maintanance -CRCA Thk : 1mm
- Control gear: Control gear unit consists of open construction Electronic Power Supply and mains connector with Loopin Loopout facility.
- Mains Supply Voltage : 110....230 Volt AC Singal Phase & 24 Volt DC

Optional : 2 nos. Vibrating Dampers for Mounting will

Optics


Opal Polycarbonate / Prysmatic diffuser.

Installation

Surface mounted type.

Applications

For Gangway, Passage, Engine Room Illumination

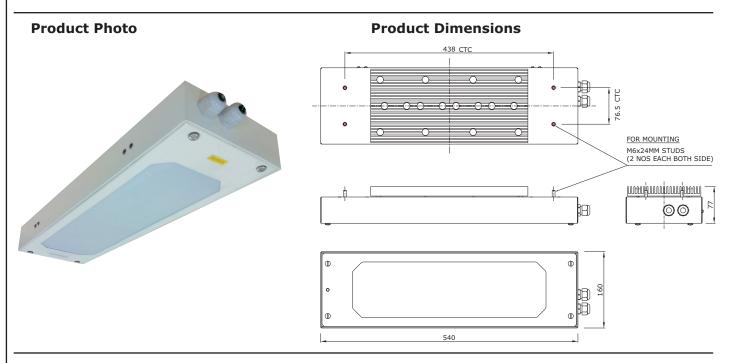

How To Order This Product

Catalogue Number	LED Type	Dimensions (mm)			Electrical Paramters		Accessories			
		Α	В	С	Input Voltage	Mains Current (Amp)	Power Supply	Capacitor	Starter	Lamp Holder
MME-COM-06	4x6W LED	540	160	77	110230 V AC	0.750	30W, 0.750A, 24V	NA	NA	NA
MME-COM-06-DC	4x6W LED	540	160	77	24 V DC	0.750	30W, 0.750A, 24V	NA	NA	NA



 As effort are on constantly to improve the design and methods of manufacturing of the product, the product supplied may differ in detail from the data given here in.	Product Type : Naval Lig	Document No :		
This Design and drawing is the property of McGeoch Marine Electricals Pvt. Ltd. and must not be copied or lent without their permission in writing .	Prepared By : Anil Raut	Approved By : Deepak Sawant	TD MMECOM06	



Technical Data Sheet Rev 00 Date : 19 / 06 / 2011

IP 54