

LED TUBE LIGHT

Naval Surface mounted LED Tube Light with Opal Polycarbonate Diffuser. Conforms to IP54. Available with 4x6 Watt LED lamps.

IP 54

Features

Housing & Cover : Al. die casted body with Epoxy Polyester powder coated Siemens Grey surface finish.(can be customised on requirement)

Control gear: Control gear unit consists of open construction Electronic Power Supply and mains connector with Loopin Loopout facility.

Mains Supply Voltage : 110....230 Volt AC Singal Phase & 24 Volt DC

Optional : 2 nos. Vibrating Dampers for Mounting will be provided if required.

Optics

Opal Polycarbonate diffuser.

Installation

Surface mounted type.


Applications

For Gangway, Passage, Engine Room Illumination

Product Photo



Product Dimensions

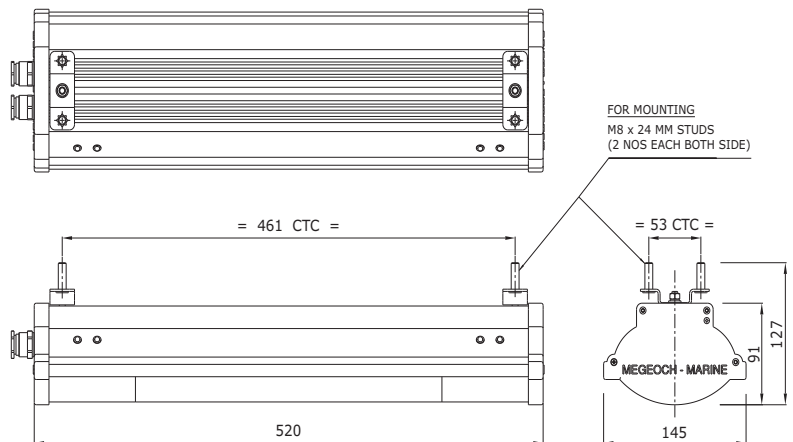

How To Order This Product

Catalogue Number	LED Type	Dimensions (mm)			Electrical Paramters		Accessories			
		A	B	C	Input Voltage	Mains Current (Amp)	Power Supply	Capacitor	Starter	Lamp Holder
MME-COM-16	4x6W LED	520	145	127	110..230 V AC	0.750	30W, 0.750A, 24V	NA	NA	NA
MME-COM-16-DC	4x6W LED	520	145	127	24 V DC	0.750	30W, 0.750A, 24V	NA	NA	NA

