

SURFACE MOUNTED AMENITY (BATHROOM MIRROR) LIGHT

Naval Surface mounted Amenity Light with Polycarbonate Diffuser. Conforms to IP44. Available with 1x11W TC-S lamps.

IP 44

Features

Housing & Cover : CRCA fabrication Body with Zink Yellow Passivation as per DF STAN 03-20 and RAL 9010 epoxy powder coated surface finish.(can be customised on requirement)
-Quick release Quarter turn Fasteners arrangement for flaper
-CRCA Thk : 1mm

Optics

Diamond Structured diffuser.

Installation

Surface mounted type.

Applications

For Bathroom

Control gear: Control gear unit consists of open construction ballast and mains connector with Looping Loopout facility.

Mains Supply Voltage : 230 Volt AC Singal Phase


Misc. : G23 Polycarbonate lamp holder for CFL lamp.

Features : Dual Out put (110/230 Volts A/C) for Saver Socket

Product Photo




Product Dimensions

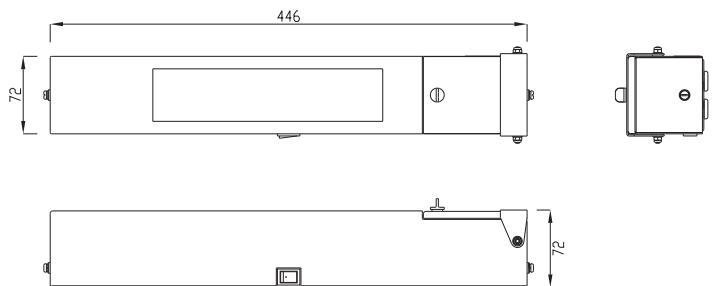

How To Order This Product

Catalogue Number	Lamp Type	Dimensions (mm)			Electrical Paramters		Accessories			
		A	B	C	Volt (V _{AC})	Mains Current (Amp)	Ballast	Capacitor	Starter	Lamp Holder
MME-COM-24	1x11W TC-S	446	72	72	230	0.15	OPT 9 C	2 uF	NA	G23



TC-S